


Control Console

- Spark counter function
- One (1) and two (2) zone standard configurations
- Built-in test function
- Individually monitored sensors
- Memory stores:
 - Spark count at each sensor
 - Number of extinguishment unit activations
 - Number of tests performed on each sensor
- User programmable configuration and settings
- Water flow confirmation at each zone
- Dust tight enclosure
- Battery backup
- Constant voltage power conditioner
- Optional panel mount printer
- Two year warranty
- Made in USA

CXC Control Console (1 and 2 Zone)

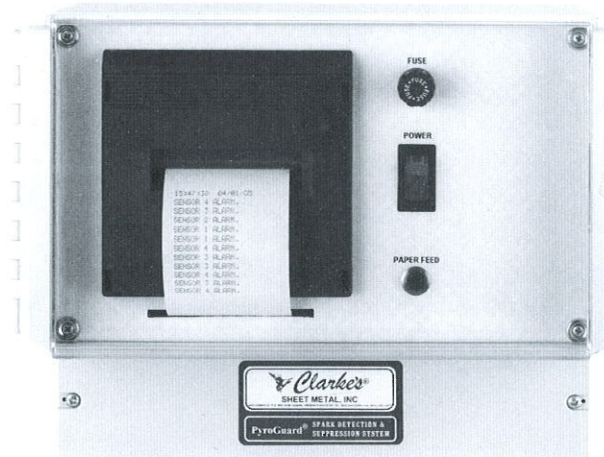

Optional CXC Printer Unit

TECHNICAL DATA

- | | |
|--------------------------------------|--|
| Power: | <ul style="list-style-type: none">• 120/240 VAC +/- 10%• 50-60 Hz 1 AMP |
| Extinguishing zones: | <ul style="list-style-type: none">• CXC-1 or CXC-2 |
| Sensors per duct: | <ul style="list-style-type: none">• Two (2) for pipe up to 79" diameter |
| Extinguishing spray duration: | <ul style="list-style-type: none">• Adjustable |
| Standby power: | <ul style="list-style-type: none">• 24 VDC (two 12 VDC 1.2 AH batteries) |
| Operating temperature: | <ul style="list-style-type: none">• 0°F to 140°F |
| Dimensions: | <ul style="list-style-type: none">• W 14-3/16" x H 12" x D 5" |
| Weight: | <ul style="list-style-type: none">• 12 lbs. |
| Standard enclosure: | <ul style="list-style-type: none">• NEMA 12 dust tight |



Clarke's Sheet Metal, Inc.
660 Conger Street • P.O. Box 2428
Eugene, OR USA 97402-0139
541-343-3395
Fax 541-345-1447

Clarke's International, Inc.
660 Conger Street • P.O. Box 2428
Eugene, OR USA 97402-0139
541-343-3395
Fax 541-345-1447

www.pyroguard.com • Email - quality@pyroguard.com